

## WX 3200 UK



Powermate portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Powermate portable generator can be used for emergency power during a power outage.

### FEATURES

- OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Recoil
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



### PERFORMANCE

Frequency	Hz	50
Voltage	V	230
Phase		1
Max Power	Watts	2950
Rated Power	Watts	2450



## Engine

Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Recoil	
Oil capacity	l	0.6
Low Oil Shutdown	√	




## Alternator

Voltage regulation system	AVR
---------------------------	-----

## Dimensional data

Length	(L) mm	680
Width	(W) mm	602
Height	(H) mm	523
Dry weight	Kg	49
Carton box dimension LxWxH	mm	685x505x520

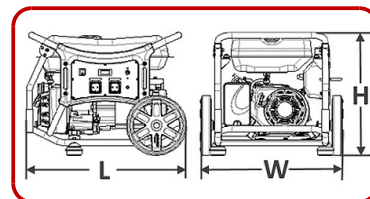

## Autonomy

Fuel tank capacity	17	
Fuel consumption @ 75%	l/h	1.29
Running time @ 75%	h	13.1



## Noise level

Guaranteed noise level (LWA)	dB(A)	93
Noise pressure level @ 7 m	dB(A)	65

## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS

- Selector switch: OFF - ON
- Recoil Start

### INSTRUMENTATION

- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

### PROTECTIONS

- Thermal protection
- Oil Guard

### SOCKET TYPE

230V BS1363 (13A) IP44	2
------------------------	---



The information is aligned with the Data file at the time of download. Printed on 15/12/2020 (ID 6440)

©2020 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice